



SOHO



DATACENTER



LINE INTERACTIVE

Vision Dual

1:1 1100-3000 VA



USB plug



Hot swap battery



Energy share



Plug & Play installation

HIGHLIGHTS

- **Automatic Voltage Regulation (AVR)**
- **Superior protection**
- **High efficiency**
- **High availability**
- **Versatility**
- **Advanced communications**

The Vision Dual range (tower and rack), includes models from 1100 VA to 3000 VA with sinusoidal digital technology. The Vision Dual range, with its advanced communications and connectivity options, is the ideal solution for installations requiring superior protection and versatility in the power supply system. Vision Dual is the ideal solution for the protection of peripheral network devices, conventional or rack servers, and network back-up systems. Vision Dual has a practical, modern design and includes several performance advantages over traditional on-line UPS. All developed by the Riello UPS research and development team.

The UPS provides efficiency levels of 98% and therefore reduced energy consumption. It has an output power factor of 0.9.

Superior protection

The automatic voltage regulator (AVR) provides protection from surges, overvoltages and undervoltages, without battery intervention. Reduced battery usage ensures that the battery set is 100% available for mains power supply failures and is able to provide greater autonomy. EMI filters then provide further protection from voltage surges and transients. When the mains power supply fails, the load is powered by the inverter and receives a perfectly sinusoidal supply for maximum power continuity and reliability.

High availability

An EnergyShare socket allows load-shedding and the shutdown of less sensitive peripheral devices to extend battery runtime for critical loads.

"Hot Swap" batteries can be removed via the front panel for easy and safe UPS maintenance.

For business continuity applications requiring long battery runtimes, battery autonomy can be extended up to several hours using ER models (versions 2200 and 3000) fitted with more powerful battery chargers.

Battery test facility to detect deteriorating battery performance.

Deep discharge protection to reduce battery ageing.

Versatility

Vision Dual can be installed as a tower or in 19" rack cabinets. The display panel can be easily removed and rotated to suit the type of installation required.

Vision Dual is equipped with an emergency power off (EPO) contact that allows for remote shutdown in emergency situations. Cold Start function to allow the UPS to power up with no mains power supply present.

Vision Dual models have a backlit LCD display providing UPS status information, load and battery performance.

Advanced communications

- Advanced multi-platform communications


for all operating systems and network environments: PowerShield³ monitoring and shutdown software included, with SNMP agent, for Windows operating systems 7, 2008, Vista, 2003, XP, Mac OS X, Sun Solaris, Linux, VMWare ESX and other Unix operating systems

- USB or RS232 serial port interface (selectable)
- Expansion slot for SNMP agent interface boards
- Status, measurements, alarms and input, output and battery parameters available on LCD display.

2-YEAR WARRANTY



DETAILS

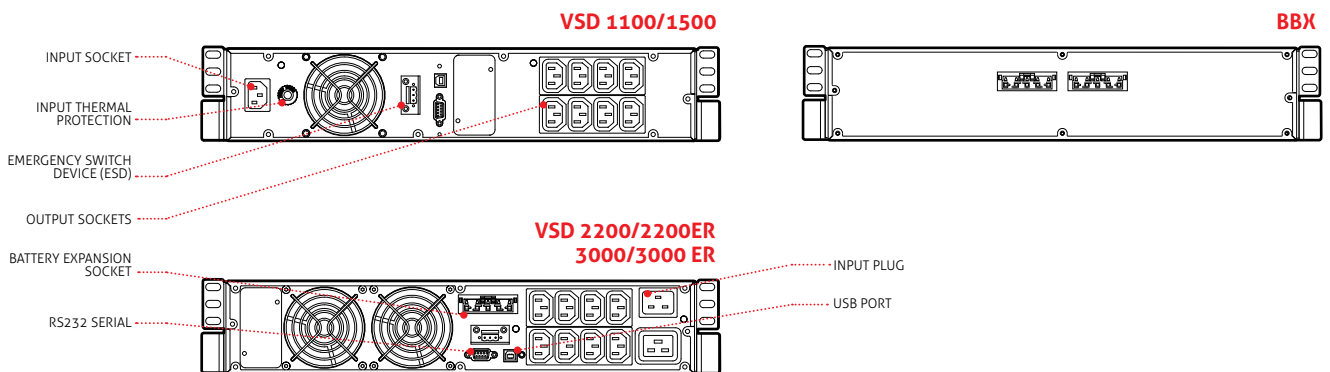

OPTIONS

SOFTWARE

PowerShield³
PowerNetGuard

ACCESSORIES

NETMAN 101 PLUS
NETMAN 102 PLUS
NETMAN 202 PLUS
MULTICOM 301
MULTICOM 302
MULTICOM 351
MULTICOM 352
MULTICOM 372
MULTICOM 382

MULTICOM 401
MULTI I/O
Interface kit AS400
MULTIPANEL
RTG 100
Manual Bypass 16 A
Manual Bypass 16 A Rack
Automatic Bypass 16 A
Automatic Bypass 16 A Rack

PRODUCT ACCESSORIES


Universal rails for installation in rack cabinets

BATTERY BOX

MODELS

BB SDH 72-A3
BB SDH 72-M1

Dimensions (mm)



MODELS	VSD 1100	VSD 1500	VSD 2200	VSD 2200 ER	VSD 3000	VSD 3000 ER
POWER	1100 VA/990 W	1500 VA/1350 W	2200 VA/1980 W	2200 VA/1760 W	3000 VA/2700 W	3000 VA/2400 W
INPUT						
Nominal voltage	220-230-240 Vac					
Voltage range without battery intervention	162 Vac < Vin < 290 Vac					
Maximum permitted voltage	300 V					
Nominal frequency	50 or 60 Hz \pm 5Hz					
Frequency range	50 Hz \pm 5% / 60 Hz \pm 5%					
Power factor	> 0.98					
Current distortion	\leq 7%					
OUTPUT						
Voltage distortion with linear load / with non-linear load	< 3% / < 8%					
Frequency	Selectable: 50 Hz or 60 Hz or self-learning					
Waveform	Sinusoidal					
Current crest factor	2.5 : 1					
Efficiency ECO and Smart Active Modes	98.5%					
BATTERIES						
Type	VRLA AGM maintenance-free lead based					
Recharge time	2-4 hours					
OVERLOAD TIMES						
100% < Load < 110%	5 minutes					
110% < Load < 150%	10 seconds					
Load > 150%	1 second					
OTHER FEATURES						
Net weight (kg)	16.5	17.5	28	15.5	31.5	16.5
Gross weight (kg)	20	21	33	20.5	36.5	21.5
Dimensions (WxDxH) (mm)	87 x 450 x 425 (2U x 19" x 425)			87 x 450 x 625 (2U x 19" x 625)		
Packaged dimensions (WxDxH) (mm)	240 x 500 x 600			240 x 600 x 760		
Protection against overvoltages	300 joules					
Protections	Overcurrent - short-circuit - overvoltage - undervoltage - temperature - excessive low battery					
Communications	USB / DB9 with RS232 and contacts / Slot for communications interface					
Input plugs	1 IEC 320 C14			1 IEC 320 C20		
Output sockets	8 IEC 320 C13			8 IEC 320 C13 + 1 IEC 320 C19		
Standards	Safety: EN 62040-1 and Directive 2006/95/EL; EMC: EN 62040-2 category C2 and Directives 2004/108/EL					
Operating temperature	0 °C / +40 °C					
Relative humidity	<95% non-condensing					
Colour	Black					
Noise level at 1 m	< 40 dBA					
Standard equipment provided	Power cable, serial cable, USB cable, safety manual, quick start guide, user manual on CD-ROM					



RPS S.p.A.

LEGNAGO (VR)

Registered office
Viale Europa, 7 ZA1
37045 LEGNAGO (Verona)
Tel +39 0442 635811
Fax +39 0442 629098
www.riello-ups.com
riello@riello-ups.com

CORMANO (MI)

Sales Office
Via Somalia, 20
20032 CORMANO (Milano)
Tel +39 02 663271
Fax +39 02 66327351

ROME

Sales Office
Via Fosso della Magliana, 34/G
00148 ROME
Tel +39 06 65192125
Fax +39 06 65192247



PRE-SALES SUPPORT
(TEC)
tec@riello-ups.com



AFTER-SALES SUPPORT
(UPService)
service@riello-ups.com

RIELLO UPS Ltd. (UK)

Unit 50 Clywedog Road North
Wrexham Industrial Estate
Wrexham LL13 9XN
Tel +44 (0)800 269 394
Fax +44 (0)1978 729 290

CONSTANT POWER SERVICES Ltd. (UK)

Unit 3 - Trust Industrial Estate,
Wilbury Way - Hitchin, Herts, SG4 0UZ
Tel +44 (0)1462 422 955
Fax +44 (0)1462 422 754

RIELLO UPS GmbH (DEUTSCHLAND)

Siemensstraße 12
21465 Reinbek bei Hamburg
Tel +49 (0)40 727 57-06
Fax +49 (0)40 727 57-189

AROS GmbH (DEUTSCHLAND)

Neufahrner Str. 12b
D-85375 Neufahrn/Grüneck
Tel +49 8165 / 9458-0
Fax +49 8165 / 9458-26

RIELLO ENERDATA s.l.u. (ESPAÑA)

C/ Labradores, 13 Parque Empresarial
Prado del Espino
28660 Boadilla del Monte - Madrid
Tel +34 916 333 000
Fax +34 916 321 793

Delegacion Andalucía

C/ Aviación 18, P. I. Calonge,
Edificio Morera y Vallejo 1, 1ª Planta
41007 Sevilla
Tel +34 955 040 044
Fax +34 955 040 041

RIELLO TDL s.l. (ESPAÑA)

C/Berguedà, 6 bis
Pol. Ind. Plà de la Bruguera
08211 Castellar del Vallès, Barcelona
Tel +34 (0)93 74 71 210
Fax +34 (0)93 71 46 562

RIELLO ONDULEURS S.a.r.l. (FRANCE)

2/4 Rue du Bois Chaland,
ZAC du Bois Chaland – 91090 Lisses
Tel +33 (0)1 60 875454
Fax +33 (0)1 60 875450

Agence Rhone Alpes - Sud

147 Avenue M. Mérieux,
Parc de Sacuny, Park Avenir 1
69530 Brignais
Tel +33 (0)4 72 177108
Fax +33 (0)4 78 351422

RIELLO PCI India Pvt. Ltd. (INDIA)

Prime Group Building,
11/5B, Pusa Road, New Delhi - 110 005
Tel +91 11 41 888 999 (30 lines),
Tel +91 11 41 888 888
Fax +91 11 2575 5815

**Riello UPS (Asia) Co., Ltd.
(PEOPLE'S REPUBLIC OF CHINA)**

28F, 500, Fute Dong Er Road,
Waigaoqiao Free Trade Zone,
Pudong District - 200131 Shanghai
Tel +86 21 50464748
Fax +86 21 50464648

Sales office Beijing

No.418, 4F, Block A, Gaode Plaza, 10
Huayuan Dong Road,
Haidian District - Beijing
Tel +86 10 82038861 / 8862
Fax +86 10 82038863

Sales office Guangzhou

Address Unit 1507 East Building,
Dongshan Square, No. 65,
Xianlie Zhong Road, Yuexiu District
510095, Guangzhou
Tel +86 20 28848001
Fax +86 20 28848002

Singapore Rep. office (ASIA PACIFIC)

138, Robinson Road
The corporate office #14-06
068906 Singapore
Tel +65 6323 4131
Fax +65 6323 4212

MARM-UPS Pty Ltd. (AUSTRALIA)

Unit 22/80 Box Road
Taren Point NSW 2229
Tel +61 2 9531 1999
Fax +61 2 9531 1988

Unit 17/810-818 Princes Hwy

Springvale VIC 3171
Tel +61 3 9574 6922
Fax +61 3 9574 6933

PO Box 2251

Yokine South WA 6060
Tel +61 1300 138,709

Follow us on Social Networks

